


OKS 451

Chain and Adhesive Lubricant, transparentt, Spray

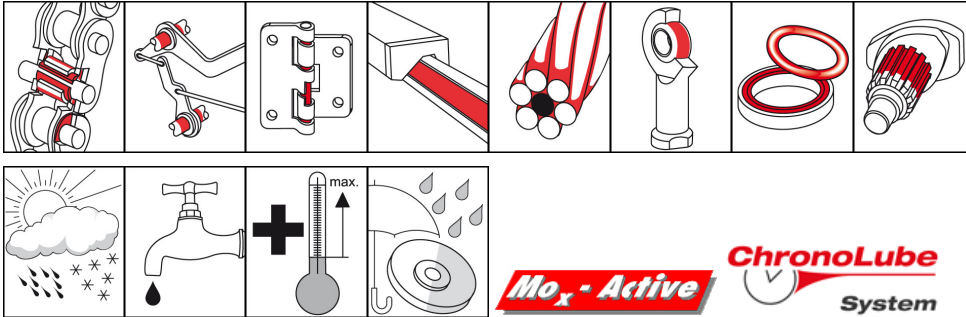

Description

Fully synthetic adhesive lubricant for the lubrication of fast-running chains and machine elements indoors and outdoors that are subjected to high loads or corrosive influences.

Applications

- Driving and conveyor chains of all designs in open or semi-enclosed operation without a re-lubrication device
- Roller chains such as motorcycle and bicycle chains
- Stacker truck chains as well as single or multiple flat-link articulated chains without a re-lubrication device
- Rope drives and wire pulls; for example, standing, hoisting, traction or winch ropes in hoisting gears, elevators, lifts or mountain railways
- Flexible drives, bowden and spring cables
- Moving machine parts exposed to outdoor weathering, such as toothed gearing, guides, closing mechanisms, hinges or sliding surfaces

Advantages and benefits

- Highly effective due to outstanding creep and gap penetration properties
- Highly adhesive and resistant to throwing off
- Contains Mox-Active for increased performance
- Excellent wear protection
- Very good resistance to cold and hot water as well as to saline solutions
- Excellent corrosion protection
- O-ring neutral

Branches

- Paper and packaging industry
- Rubber and plastic processing
- Plant and machine (tool) engineering
- Municipal services
- Rail vehicle technology
- Iron and steel industry
- Logistics
- Chemical industry
- Glass and foundry industry
- Shipbuilding and marine technology



OKS 451

Chain and Adhesive Lubricant, transparentt, Spray

Application tips

For best adhesion, clean the surfaces. Best way is to clean mechanically first and then with OKS 2610/OKS 2611 universal cleaner. Apply OKS 450 with a brush, drip oiler or by immersion or using a suitable automatic lubrication system locations to be lubricated. Spray on evenly OKS 451 spray. Allow excess to drip off and wait for lubricant to penetrate before resuming operation. In as far as available, observe the machine manufacturer's instructions. Assess the lubrication frequency and quantity on basis of service conditions, avoid excessive lubrication. Caution: Only mix with suitable lubricants.

Packaging

- 400 ml Spray

Technical Data

	Standard	Conditions	Unit	Value
Main components				
additives				adhesion improver
additives				Mox-Active
base oil				synthetic oil mixture
Application related technical data				
colour				brown-transparent
density (at 20°C)			g/cm ³	0.9
flashing point	DIN EN 22 719	> 79	°C	164
four-ball test rig welding load	DIN 51 350-4		N	2,400
lower operating temperature			°C	-30
marking	DIN 51 502			CLP X 320
upper operating temperature			°C	200
viscosity at (40°C)	DIN 51 562-1		mm ² /s	300
viscosity class	DIN 51 519	DIN 51 562-1, 40°C	ISO VG class	320

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47
 82216 Maisach
 Phone: +49 (0) 8142 3051 - 500
 info@oks-germany.com
 www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark

Safety data sheet for industrial and commercial users is available for downloading under www.oks-germany.com.

Our Customer and Technical service will be pleased to help should you have any further questions.