


OKS 511 MoS₂ Bonded Coating, fast-drying, Spray

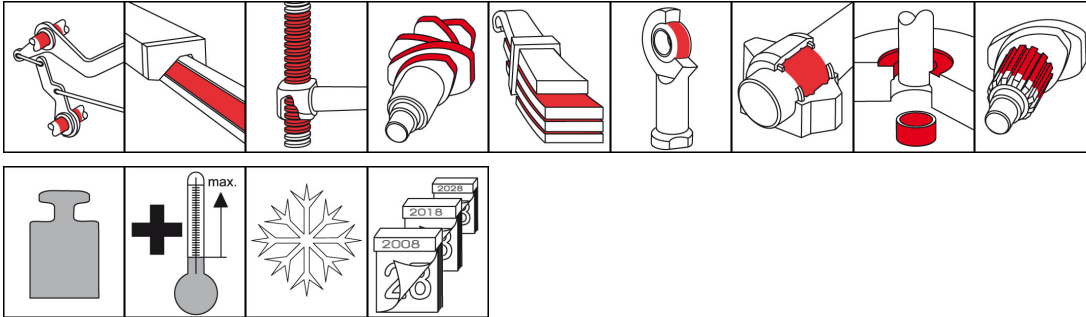

Description

Air-drying bonded coating on MoS₂ basis for dry lubrication of machine elements at temporary operation and long standstill periods.

Applications

- Run-in lubrication in combination with oil or grease lubrication
- Dry lubrication at sliding pairs, in particular under heavy loads and low sliding speeds, at oscillating movements or intermittent operation
- Dry lubrication at high operating temperatures (up to 450°C), shorter sliding paths and low speeds
- Dry lubrication in dusty environment, to avoid adhesions
- Coating of punching tools

Advantages and benefits

- Highly effective due to good adhesion to prepared substrates
- Allows a low coefficient of sliding friction also under heavy loading
- Increased wear protection
- Radiation and vacuum-resistant
- Shortens and improves run-in conditions of friction bearings, toothings and other sliding pairs

Branches

- Iron and steel industry
- Chemical industry
- Rail vehicle technology
- Glass and foundry industry
- Paper and packaging industry
- Logistics
- Municipal services
- Shipbuilding and marine technology
- Plant and machine (tool) engineering
- Rubber and plastic processing



OKS 511

MoS2 Bonded Coating, fast-drying, Spray

Application tips

For best adhesion, clean the surfaces mechanically first and then with OKS 2610/OKS 2611 universal cleaner. The surfaces to be treated must be bright metal and dry, surface roughnesses of 5-10 µm have proved to be favourable. Chemical or mechanical pre-treatment of surfaces may extend the service life of the non-stick paint. Stir the paint thoroughly before use. At OKS 510 apply in an evenly thin film to the prepared surfaces, preferably by spraying or dipping, in individual cases also by brush. Spray on evenly OKS 511 spray. Avoid excesses. Drying and curing conditions as per the following technical data.

Packaging

- 400 ml Spray

Technical Data

	Standard	Conditions	Unit	Value
Main components				
binder				silicone resin
solid lubricants				graphite
solid lubricants				MoS2
solvent				butyl acetate
solvent				benzine
Application related technical data				
colour				grey-black
density (at 20°C)	DIN EN ISO 3838		g/cm³	0.96
drying time			min	30
flashing point	DIN 51 755 (-2)	< 65 (< 5°C)	°C	-30
lower operating temperature			°C	-180
optimal layer thickness	DIN 50 981/50 984	DIN 50 982-2	µm	10-15
press-fit test	draft DIN 51 833		µ	0.07, no chatter
processing temperature			°C	20-25
surface covering			m²/kg	10-50
upper operating temperature			°C	450

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47
 82216 Maisach
 Phone: +49 (0) 8142 3051 - 500
 info@oks-germany.com
 www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark

Safety data sheet for industrial and commercial users is available for downloading under www.oks-germany.com.

Our Customer and Technical service will be pleased to help should you have any further questions.