



OKS 631 Multi Oil PLUS with PTFE, Spray

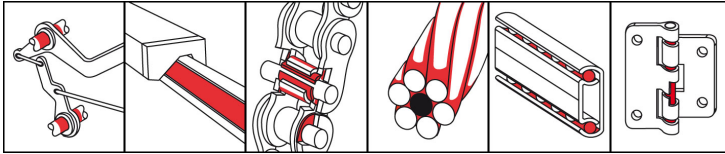

Description

Multipurpose oil with outstanding wear protection for a broad range of applications in maintenance and servicing.

Applications

- Lubrication of machine elements that are difficult to access, such as levers, slideways, chains, hinges that are subjected to high pressures
- Lubrication of moving parts under the influence of dirt or humidity
- Elimination of squeaking and creaking noises

Branches

- Paper and packaging industry
- Municipal services
- Shipbuilding and marine technology
- Rubber and plastic processing
- Glass and foundry industry
- Rail vehicle technology
- Chemical industry
- Iron and steel industry
- Maintenance and servicing
- Plant and machine (tool) engineering
- Logistics

Advantages and benefits

- Excellent wear protection through PTFE additive
- Good lubricating and pressure absorption capacity, high resistance to ageing
- Good creep properties
- Infiltrates moisture
- Good corrosion protection, prevents new corrosion from forming
- Good adhesive strength
- Silicone-free

Application tips

For highest effectiveness, clean the lubrication point. Best way is to clean mechanically first and then with OKS 2610/ OKS 2611 universal cleaner. Stir well before use, shake can well (approx. 20 seconds until the stirring ball can be heard). Apply sufficient OKS 630 with a brush, drip oiler, oil can or by immersion. Spray OKS 631 on evenly. Remove any excess. Only mix with suitable lubricants.

Packaging

- 400 ml Spray



OKS 631
Multi Oil PLUS with PTFE, Spray

Technical Data

	Standard	Conditions	Unit	Value
Main components				
base oil				mineral oil
solid lubricants				PTFE
Application related technical data				
coefficient of friction SRV	analogue to DIN 51 834-2	ball, disk	μ	0.1
colour				beige
density (at 20°C)	DIN EN ISO 3838		g/cm ³	0.83
flashing point	DIN ISO 2592		°C	> 64
lower operating temperature			°C	-30
salt spray test	DIN EN ISO 9227		h	50
upper operating temperature		with solvent	°C	60
upper operating temperature		after evaporation of the solvent	°C	100
viscosity at (40°C)	DIN 51 562-1	with solvent	mm ² /s	5
wear SRV	analogue to DIN 51 834-2	ball, disk		0.001

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47
 82216 Maisach
 Phone: +49 (0) 8142 3051 - 500
 info@oks-germany.com
 www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark

Safety data sheet for industrial and commercial users is available for downloading under www.oks-germany.com.

Our Customer and Technical service will be pleased to help should you have any further questions.